


Encapsulation of “type d” asbestos cement artefacts, helpful in their removal

LV29_SA_EN_R2-0517

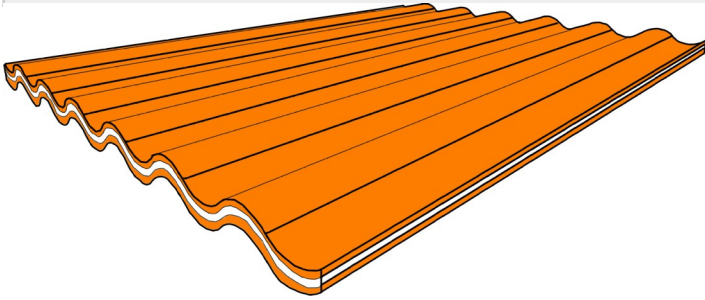

APPLICATION DATA SHEET

Encapsulation of “type d” asbestos cement artefacts,
helpful in their removal, by:

1. preparation of the substrates;
2. encapsulation.

1) PREPARATION OF THE SUBSTRATES

The use of the products will be carried out with suitable equipment, by qualified personnel and according to the laws.

2) ENCAPSULATION

Spraying of single-component acrylic resin **Kimicover K80**.
The resin, red in colour, will be applied in a single layer for an average consumption of about 0.150 kg/m².
The total thickness of the encapsulating coating must not be less than 30 microns.