


## Cleaning and protection of stone materials against stains caused by paints and felt-tip pens

LV36\_SA\_EN\_R2-0617

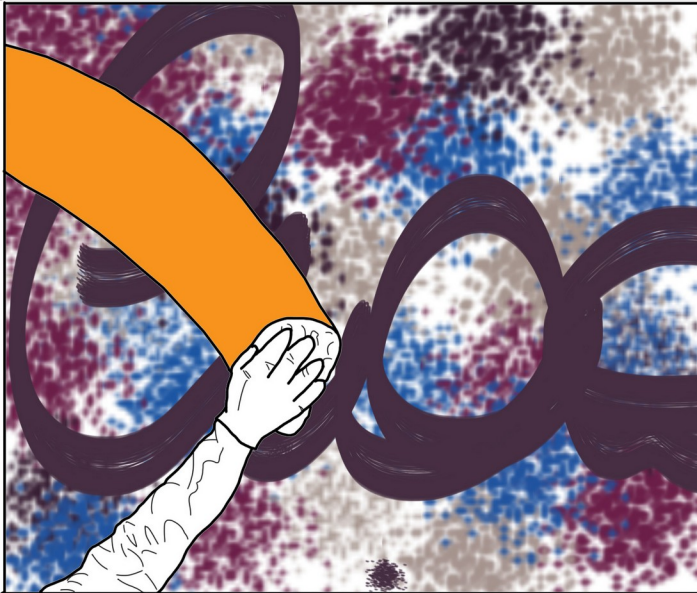

consumption rate indicated in the Technical Data Sheet. Once the anti-graffiti protection has been applied, it will be possible to remove any future stain with a simple jet of hot (80 ° C) pressurized (60-80 bar) water.

### APPLICATION DATA SHEET

Cleaning and protection of stone materials against stains caused by paints and felt-tip pens by:

1. cleaning;
2. protection.

#### 1) CLEANING

On stone surfaces to be cleaned apply with a brush or roller ecological cleaner **Kimistone GRAFIX MOOVE S**, specific to remove spray colour, ink and felt-tip pen traces without modifying the original surface.

Follow the consumption rate indicated in the Technical Data Sheet. Once the product has been applied, let it dry for 20-30 minutes after the application then brush it vigorously and rinse with pressurized water. In the presence of stratified, strongly penetrated or old dirt, extend the waiting time before brushing or repeat the procedure several times.

#### 2) PROTECTION

On the clean and dry substrate, apply, with a brush or a low pressure gun, water-based ecological anti-graffiti protection **Kimistone DEFENDER**, which is perfectly breathable, highly reversible and chemically inert. The product protects stone materials and artifacts from vandal paints, preventing them from penetrating deep into the surface. Respect the