


Pointing of cotto or square stone facades with joints of width less than 1 cm

LV70_SA_EN_R2-0517

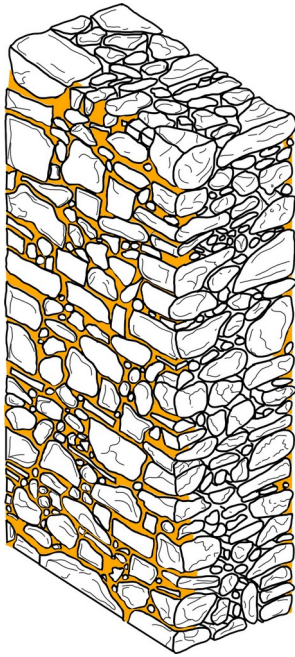

APPLICATION DATA SHEET

Pointing of cotto or square stone facades with joints
of width less than 1 cm through:

1. preparation of the substrate;
2. pointing.

1) PREPARATION OF THE SUBSTRATE

Manually or mechanically skive mortar joints in mixed masonry, stone, tuff or brickwork and, if necessary, wash the masonry in order to obtain a healthy and compact substrate free from flimsy or detaching parts, efflorescence salt pans, dust and mold.

Saturate the substrate with water (condition s.s.d.)

2) POINTING

Apply in many layers the ready-to-use mortar **Limepor MT / F** with a trowel, applying light pressure to facilitate adherence to the substrate, taking care not to smear the stones.

Remove excess mortar immediately after spreading.

Treat the joints with a wet sponge.