


Pointing of cotto or exposed stone facades by using a binder mixed with sand

LV71_SA_EN_R2-0517

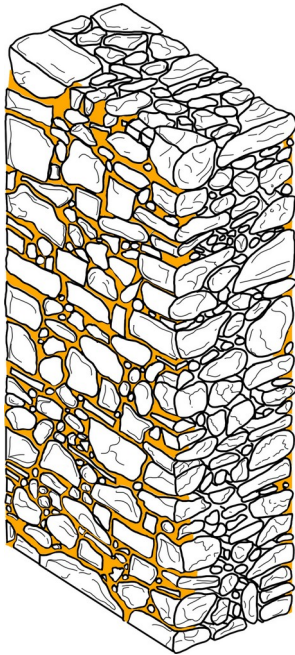

Application notes

In the case of mortars created on site, the mixing water must be dosed to the minimum necessary, based on the aggregate humidity: any excess water decreases the final performance of the product.

APPLICATION DATA SHEET

Pointing of cotto or exposed stone facades by using a binder mixed with sand through:

1. preparation of the substrate;
2. pointing.

1) PREPARATION OF THE SUBSTRATE

Manually or mechanically skive mortar joints in mixed masonry, stone, tuff or brickwork and, if necessary, wash the masonry in order to obtain a healthy and compact substrate free from flimsy or detaching parts, efflorescence salt pans, dust and mold.

Saturate the substrate with water (s.s.d. condition)

2) POINTING

Apply with a trowel, in many layers, the ready-to-use mortar **Limepor LGS** mixed with drinking water and aggregates with suitable granulometry (follow the consumption rate indicated in the Technical Data Sheet), applying light pressure to facilitate adherence to the substrate, taking care not to smear the stones.

Remove excess mortar immediately after spreading.

Treat the joints with a wet sponge.