


## Pointing of cotto or exposed stone facades by using ready-to-use mortar

LV72\_SA\_EN\_R3-1019

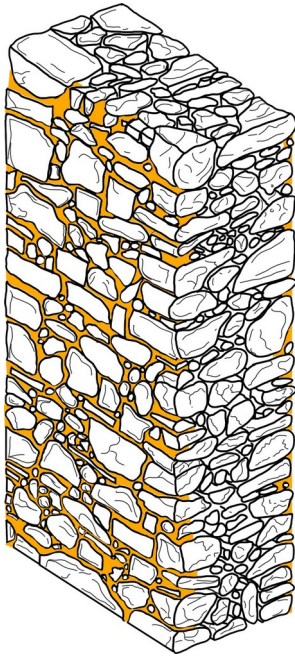

### APPLICATION DATA SHEET

Pointing of cotto or exposed stone facades by using ready-to-use mortar through:

1. preparation of the substrate;
2. pointing.

#### 1) PREPARATION OF THE SUBSTRATE

Manually or mechanically skive mortar joints in mixed masonry, stone, tuff or brickwork and, if necessary, wash the masonry in order to obtain a healthy and compact substrate free from flimsy or detaching parts, efflorescence salt pans, dust and mold.

Saturate the substrate with water (s.s.d. condition)

#### 2) POINTING

Apply in many layers the ready-to-use mortar **Limepor MT**, with a trowel, applying light pressure to facilitate adherence to the substrate, taking care not to smear the stones. Remove excess mortar immediately after spreading. Treat the joints with a wet sponge.

#### POSSIBLE ALTERNATIVES

As an alternative to **Limepor MT** it is possible to carry out the pointing by applying lime-based mortar with a maximum grain size of 3 mm, hazel in color with pink shades, **Limepor PMP CIVITAS**.